

SVERKER 650 Relay Test Set



- **Designed for rugged field use**
- **0 to 100 Amp output current**
- **Suitable for testing many different types of relays such as power, voltage and current**
- **Easy to operate**

Description

The Sverker 650 testing unit, whose design incorporates benefits gleaned from many years of experience in field relay testing, enjoys a well-earned reputation for reliability and convenience. Compact and powerful, it provides all of the functions needed for secondary testing of almost all types of single-phase protection now available on the market.


SVERKER 650 features logical design and construction, and it is extraordinarily easy to learn and use. Its compact design and light weight makes it extremely portable.

Auxiliary equipment for SVERKER 650 includes a test lead set and a rugged transport case. Another useful accessory is the ACA120 voltage source which makes it easier to test directional relays.

Application

The Sverker 650 is for use in high-voltage substations and industrial environments. The built-in capacitor provides phase shift when testing directional protective relays, a set of resistors can be used to divide voltages.

The Sverker 650 is intended primarily for secondary injection testing of protective relays. Virtually all types of single phase protection can be tested.

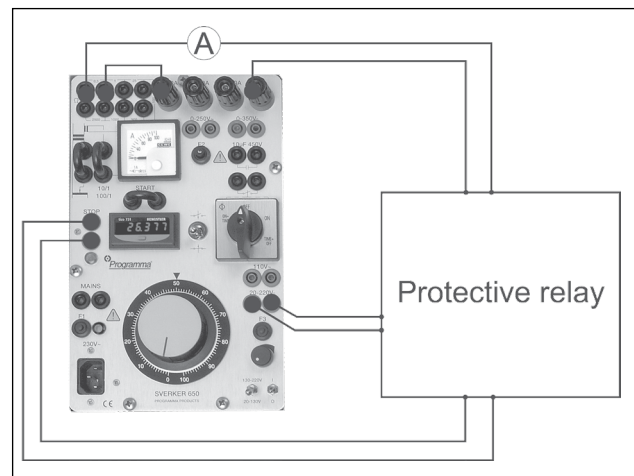


Typical protective relay test connection

Features and benefits

Terminals	Unloaded (Mains 230 V)	
U1	0–10 A	85–90 V AC
U2	0–40 A	25–27 V AC
U3	0–100A	10.0–11.0V AC
U4	0–250 V, 3 A	250–270 V AC
U5	0–350 V, 2A	350–370 V DC
U6	20–220 V DC	
The voltage is stabilized and variable in two steps with the switch S3. Characteristics at input voltage 220 V AC + 10 % Ripple (peak to peak) max 4 % Load regulation 3 % Line regulation less than 4 %		
U7	110 V 0.3 A	110–125 V AC
F1	Automatic cut-out for the mains voltage, 4 A	
F2	Automatic cut-out 3 A	
F3	Automatic cut-out 0.5 A	
E1	Green indicator for mains voltage	
E2	Yellow signal lamp in the trip circuit	
MI	Mains input	
MO	Mains output	

P1	Electric timer, independent of mains frequency Measuring range 0–999.999 sec. Accuracy 0.002% of readout +0,-2 ms
P2	Input for stop of timer
P3	Ammeter class 1.5
R	Resistors
C1	Capacitor 10 µF/450 V AC for reactive power relays
S1	Main switch
S2	On/off switch for terminals U6 and U7
S3	Selector voltage range terminal U6
S4	Make/break switch for timer
R5	Voltage adjustment terminal U6
W1	Terminal for connection of a resistor on the primary side of the output transformer
W2	Terminal for an external ammeter
W3	Terminal for external start and stop of timer

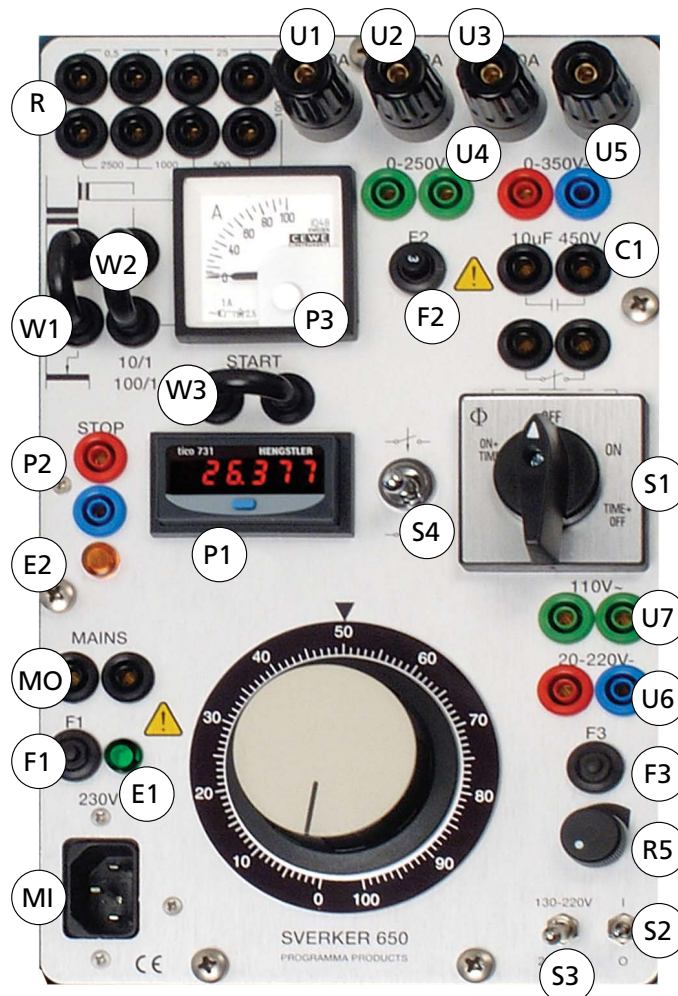

Optional Accessories

The ACA120 Variable Voltage Source provides a variable output voltage of 0 to 120V AC. This makes it easier to test directional protection using SVERKER 650. Power is supplied from the relay testing unit's 110V AC output. Housed in a small plastic case.


Output current: 90 mA (max).

Dimensions: 80 x 150 x 65 mm (3.1 x 5.9 x 2.6")

Weight: 0.6 kg (1.3 lbs)



Application example

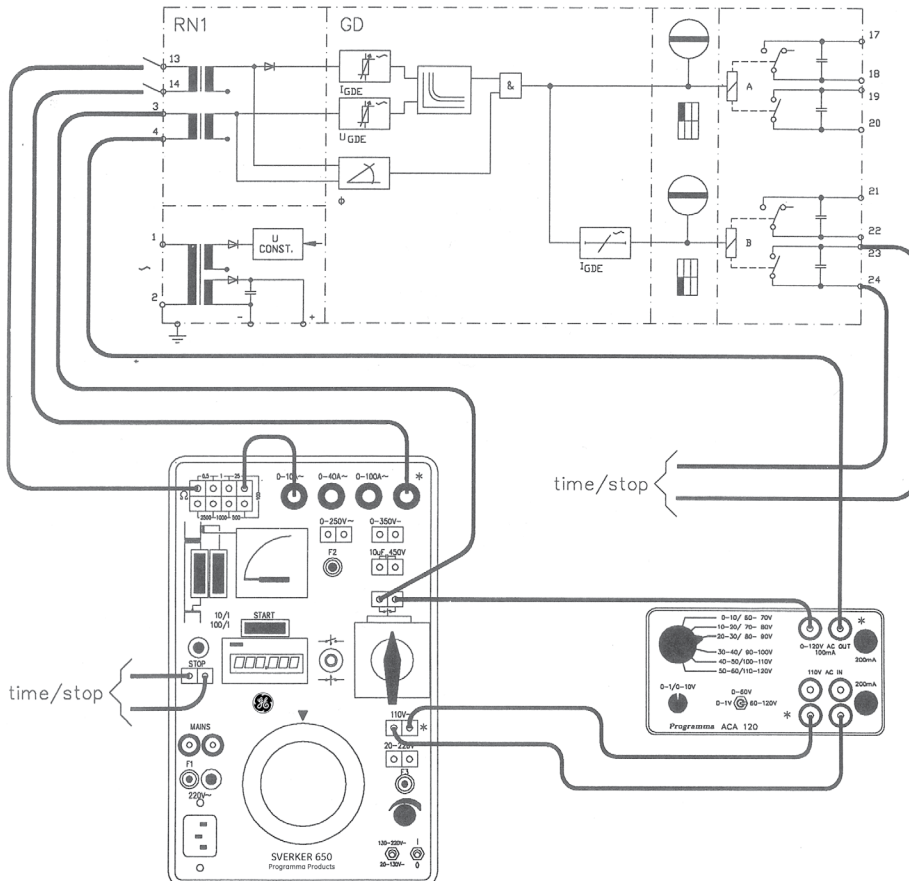

Specifications SVERKER 650

Specifications are valid at nominal input voltage and an ambient temperature of +25°C, (77°F). Specifications are subject to change without notice.

Environment

Application field The instrument is intended for use in high-voltage substations and industrial environments.

Temperature

Operating 0°C to +50°C (32°F to +122°F)

Storage & transport -40°C to 70°C (-40°F to +158°F)

Humidity

5% – 95% RH, non-condensing

CE-marking

LVD 2006/95/EC

EMC 2004/108/EC

General

Mains voltage 115/230 V AC, 50/60 Hz

Power consumption 1100 VA (max)

Protection Thermal cut-outs, miniature circuit breakers

Dimensions

Instrument 280 x 178 x 250 mm (11" x 7" x 9.8")

Transport case 560 x 260 x 360 mm (22" x 10.2" x 14.2")

Weight

16 kg (35.3 lbs)
26 kg (57.3 lbs) with accessories and transport case.

Test lead set, with 2 x 0.25 m (0.8 ft), 2.5 mm²

4 mm stackable 2 x 0.5 m (1.6 ft), 2.5 mm²

safety plugs 8 x 2.0 m (6.6 ft), 2.5 mm²

Test leads with spade-tongue connectors 2 x 3.0 m (9.8 ft), 10 mm²

Measurement section

Current measurement

Built-in ammeter

Ranges 0 – 10 A / 0 – 100 A

Inaccuracy ±3%

External ammeter

Output for external ammeter Connected to built-in current transformer

Inaccuracy ±0.5%

Timer

Range 0 – 999.999 s

Resolution 1 ms

Inaccuracy ±0.02% of displayed value, +2 ms
Independent of mains frequency

Outputs

Current outputs, AC

Range	No-load voltage (min)	Output voltage (min)	Load/unload times On (max)/Off (min)
0 – 10 A	85 V	75 V (10 A)	2 min/30 min
0 – 40 A	25 V	19 V (40 A)	20 s/15 min
0 – 100 A	10 V	7.7 V (100 A)	20 s/5 min

Voltage outputs, AC/DC

Range	Output voltage (min)
0 – 250 V AC	220 V (2.7 A)
110 V AC (fixed)	110 V (0.3 A)
0 – 350 V DC	280 V (2 A)
20 – 220 V DC (stab.)	200 V (0.25 A)

Other

Built-in capacitor provides phase shift when testing directional protection, and a set of resistors can be used to divide voltages.

Output used to start external cycles.

Terminal for external start/stop of built-in timer.

Terminal for connecting serial impedance when testing nonlinear protection.



Test lead set GA-00030

Ordering information

Item	Art. no.
SVERKER 650	
Incl. Test lead set GA-00030	
Transport case GD-00010	
115 V Mains voltage	BA-11190
230 V Mains voltage	BA-12290
Optional Accessories	
ACA120	
Variable output , 0-120 V AC	BA-90040

SWEDEN

Megger Sweden AB
Eldarvägen 4, Box 2970
SE-187 29 TÄBY
T +46 8 510 195 00
F +46 8 510 195 95
E seinfo@megger.com

UK

Archcliffe Road Dover
CT17 9EN England
T +44 (0) 1304 502101
F +44 (0) 1304 207342

Other Technical Sales Offices

Dallas USA, Norristown USA,
Toronto CANADA, Trappes FRANCE,
Oberursel GERMANY, Johannesburg
SOUTH AFRICA, Kingdom of BAHRAIN
Mumbai INDIA, Chonburi THAILAND
Sydney AUSTRALIA

Registered to ISO 9001 and 14001
Subject to change without notice.
Art.nr. ZI-BA03E • Doc. BA0209BE • 2010
SVERKER_650_DS_en_V02
www.megger.com
Megger is a registered trademark