

# TORKEl 840/860

## Battery Load Units



- Batteries can be tested “in service”
- Unit adjusts to include load currents in the test parameters
- User adjustable alarm and shutdown points to avoid excessive discharge
- Easily expandable for larger battery banks using TXL extra load units
- View test parameters/results “real time” as testing progresses using TORKEl WIN software
- Easily save results to a PC for analysis, report generation and storage

### Description

Batteries in power plants and transformer substations must provide the equipment they serve with standby power in the event of a power failure. Unfortunately, however, the capacity of such batteries can drop significantly for a number of reasons before their calculated life expectancy is reached. This is why it is so important to check batteries at regular intervals, and the only reliable way of measuring battery capacity is to conduct a discharge test.

TORKEl™ 840 - UTILITY is used for battery systems ranging from 12 to 250 V – often encountered in switchgear and similar equipment. Discharging can take place at up to 110 A, and if higher current is needed, two or more TORKEl 840 units or extra load units, TXL, can be linked together. Tests can be conducted at constant current, constant power, constant resistance or in accordance with a pre-selected load profile.


TORKEl 860 - MULTI is designed primarily for people who travel from place to place to maintain battery systems having different voltages. It features excellent discharging capacity plus a broad voltage range and outstanding portability – a unique combination.

TORKEl 860 is used for systems ranging from 12 to 480 V, and discharging can proceed at up to 110 A. If higher current is desired, two or more TORKEl 860 units or extra load units, TXL, can be linked together. Discharging can take place at constant current, constant power, constant resistance or in accordance with a pre-selected load profile.

### Application example

Testing can be carried out without disconnecting the battery from the equipment it serves. Via a DC clamp-on ammeter, TORKEl measures total battery current while regulating it at a constant level.

The TORKEl is connected to battery, the current and the voltage alarm level are set. After starting the discharge TORKEl keeps the current constant at the preset level. When the voltage drops to a level slightly above the final voltage, TORKEl issues an alarm. If the voltage drops so low that there is a risk for deep discharging the battery, TORKEl shuts down the test. The total voltage curve and the readings taken at the end of the test are stored in TORKEl. Later, using the TORKEl Win program, you can transfer these readings to your computer for storage, printout or export. If your PC is connected to TORKEl during the test, TORKEl Win builds up a voltage curve on the screen in real time and displays the current, voltage and capacity readings. You can also control the test using TORKEl Win.

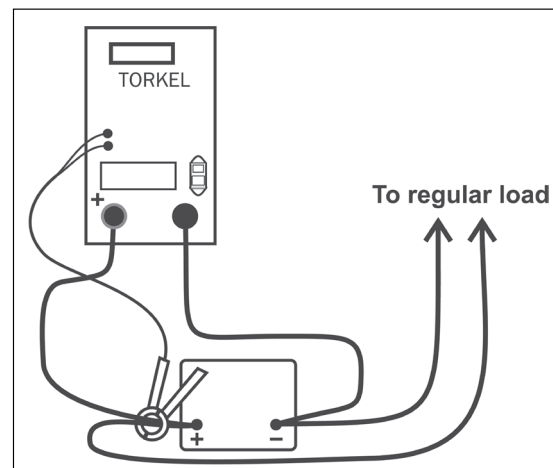

**Features and benefits**

1. Display
2. External measurement input used to measure current in an external path by means of a clamp-on ammeter or a current shunt.
3. Keys for operation and settings.
4. Alarm output equipped with a relay contact for triggering an external alarm device.
5. Start/Stop input used for starting and stopping discharging from an external device. Galvanically isolated.
6. Indicating lamps. Operating, Stop/Limit
7. TXL output used for control of TXL Extra Loads. Galvanically isolated.
8. Serial port used for connection to a PC or other controlling equipment.
9. Voltage controlled circuit breaker that connects / disconnects the loading circuits in TORKEl from the battery.
10. Positive current connection for battery being tested.
11. Input for sensing voltage at the battery terminals.
12. Negative current connection for battery being tested.
13. Mains connector, equipped with ON/OFF switch.




**Application examples with TORKEl/TXL systems**

TORKEl and TXL can be combined into systems to match up for different battery capacities. These resistive extra loads do not perform any regulating functions. They are designed for use together with TORKEl Battery Load Units. Their purpose is to provide higher load currents for use in constant current or constant power tests. Together, TORKEl and the TXL Extra Loads form a system that can discharge batteries with currents of up to several kA. TXL Extra Loads are connected directly to the battery, and TORKEl measures the total current using a clamp-on ammeter. TXL Extra Loads are shut down automatically when TORKEl is stopped.

**TORKEl/TXL - systems examples**

Max. constant current (A)	Number of TORKEl-units	Number of TXL-units
<b>TORKEl 840/860 + TXL830, 24 V battery (12 cells)<sup>1)</sup></b>		
263	1	1
670	2	2
1005	3	3
<b>TORKEl 840/860 + TXL850, 48 V battery (24 cells)<sup>1)</sup></b>		
264	1	1
909	2	3
<b>TORKEl 840/860 + TXL870, 110 V battery (54 cells)<sup>1)</sup></b>		
188	1	1
532	2	4
845	2	8
<b>TORKEl 840/860 + TXL870, 120 V battery (60 cells)<sup>2)</sup></b>		
194	1	1
557	2	4
895	2	8
<b>TORKEl 840/860 + TXL870, 220 V battery (108 cells)<sup>1)</sup></b>		
94	1	1
266	2	4
423	2	8
<b>TORKEl 840/860 + TXL890, 440 V battery (216 cells)<sup>1)</sup></b>		
59	1	1
86	1	2

1) Discharge from 2.15 V to 1.8 V per cell  
2) Discharge from 2.15 to 1.75 V per cell

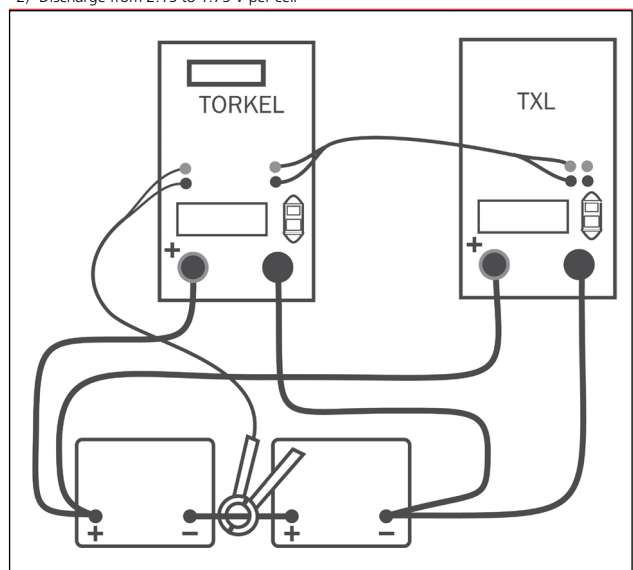

TORKEl and the extra load TXL

**Specifications TORHEL 840/860**

Specifications are valid at nominal input voltage and an ambient temperature of +25°C, (77°F). Specifications are subject to change without notice.

**Environment**

*Application field* The instrument is intended for use in high-voltage substations and industrial environments.

*Temperature*

*Operating* 0°C to +40°C (32°F to +104°F)  
*Storage & transport* -40°C to +70°C (-40°F to +158°F)

*Humidity* 5% – 95% RH, non-condensing

**CE-marking**

*EMC* 2004/108/EC

*LVD* 2006/95/EC

**General**

*Mains voltage* 100 – 240 V AC, 50/60 Hz

*Power consumption (max)* 150 W

*Protection* Thermal cut-outs, automatic overload protection

*Dimensions*

*Instrument* 210 x 353 x 700 mm (8.3" x 13.9" x 27.6")

*Transport case* 265 x 460 x 750 mm (10.4" x 18.1" x 29.5")

*Weight* 21.5 kg (47.4 lbs)  
38 kg (83.8 lbs) with accessories and transport case.

*Display* LCD

*Available languages* English, French, German, Spanish, Swedish

**Measurement section**

**Current measurement**

*Display range* 0.0 – 2999 A  
*Basic inaccuracy* ±(0.5% of reading +0.2 A)  
*Resolution* 0.1 A

**Internal current measurement**

*Range* 0 – 300 A

**Input for clamp-on ammeter**

*Range* 0 – 1 V  
*mV/A-ratio* Software settable, 0.3 to 19.9 mV/A  
*Input impedance* >1 MΩ

**Voltage measurement**

**Display range 0.0 – 60 V**

*Basic inaccuracy* ±(0.5% of reading +0.1 V)  
*Resolution* 0.1 V

**Display range 0.0 – 500 V**

*Basic inaccuracy* ±(0.5% of reading +1 V)  
*Resolution* 0.1 V

**Time measurement**

*Basic inaccuracy* ±0.1% of reading ±1 digit

**Load section**

*Max. battery voltage* 288 V DC (TORHEL 840)  
480 V DC (TORHEL 860)

*Max. current* 110 A

*Max. power* 15 kW

*Load patterns* Constant current, constant power, constant resistance, current or power profile

*Current setting* 0-110.0 A (2999.9 A) <sup>1)</sup>

*Power setting* 0-15.00 kW (299.99 kW) <sup>1)</sup>

*Resistance setting* 0.1-2999.8 Ω

*Battery voltage range, TORHEL 840* 4 ranges, selected automatically at start of test

*Battery voltage range, TORHEL 860* 5 ranges, selected automatically at start of test

*Stabilization (For internal current measurement)* ±(0.5% of reading +0.5 A)

	Battery voltage	Highest permissible current	Resistor element (Nominal values)
<b>Range 1</b>	10 – 27.6 V	110 A	0.165 Ω
<b>Range 2</b>	10 – 55.2 V	110 A	0.275 Ω
<b>Range 3</b>	10 – 144 V	110 A	0.55 Ω
<b>Range 4</b>	10 – 288 V	55 A	3.3 Ω
<b>Range 5 <sup>2)</sup></b>	10 – 480 V	55 A (max power 15 kW)	3.3 Ω

1) Maximum value for a system with more than one load unit

2) TORHEL 860

**Inputs, maximal values**

**EXTERNAL CURRENT MEASUREMENT** 1 V DC, 300 V DC to ground. Current shunt should be connected to the negative side of the battery

**START/STOP** Closing/opening contact  
Closing and then opening the contact will start/stop Torkel. It is not possible to keep the contacts in closed position.

*Delay until start* 200 – 300 ms

*Stop delay* 100 – 200 ms

*Battery* 480 V DC, 500 V DC to ground

**VOLTAGE SENSE** 480 V DC, 500 V DC to ground

**SERIAL** < 15 V

**ALARM** 250 V DC 0.28 A

28 V DC 8 A

250 V AC 8 A

**Outputs, maximal values**

**START/STOP** 5 V, 6 mA

**TXL** Relay contact

**SERIAL** < 15 V

**ALARM** Relay contact

## Discharging capacity, examples

### 12 V battery (6 cells)<sup>3)</sup>

Final voltage	Constant current	Constant power
1.80 V/cell (10.8 V)	0 – 50.0 A	0 – 0.54 kW
1.75 V/cell (10.5 V)	0 – 49.0 A	0 – 0.51 kW
1.67 V/cell (10.0 V)	0 – 46.0 A	0 – 0.46 kW

### 24 V battery (12 cells)<sup>3)</sup>

1.80 V/cell (21.6 V)	0 – 110 A	0 – 2.37 kW
1.75 V/cell (21.0 V)	0 – 110 A	0 – 2.31 kW
1.60 V/cell (19.2 V)	0 – 100 A	0 – 1.92 kW

### 48 V battery (24 cells)<sup>3)</sup>

1.80 V/cell (43.2 V)	0 – 110 A	0 – 4.75 kW
1.75 V/cell (42.0 V)	0 – 110 A	0 – 4.62 kW
1.60 V/cell (38.4 V)	0 – 110 A	0 – 4.22 kW

### 110 V battery (54 cells)<sup>3)</sup>

1.80 V/cell (97.2 V)	0 – 110 A	0 – 10.7 kW
1.75 V/cell (94.5 V)	0 – 110 A	0 – 10.4 kW
1.60 V/cell (86.4 V)	0 – 110 A	0 – 9.5 kW

### 120 V battery (60 cells)<sup>3)</sup>

1.80 V/cell (108 V)	0 – 110 A	0 – 11.9 kW
1.75 V/cell (105 V)	0 – 110 A	0 – 11.5 kW
1.60 V/cell (96 V)	0 – 110 A	0 – 10.5 kW

### 220 V battery (108 cells)<sup>3)</sup>

1.80 V/cell (194 V)	0 – 55 A	0 – 10.7 kW
1.75 V/cell (189 V)	0 – 55 A	0 – 10.4 kW
1.60 V/cell (173 V)	0 – 51.0 A	0 – 8.82 kW

### 240 V battery (120 cells)<sup>3)</sup>

1.80 V/cell (216 V)	0 – 55 A	0 – 11.9 kW
1.75 V/cell (210 V)	0 – 55 A	0 – 11.5 kW
1.60 V/cell (192 V)	0 – 55 A	0 – 10.5 kW

### UPS battery (180 cells)<sup>3)</sup> (TORKEL 860)

1.70 V/cell (306 V)	0 – 38 A	0 – 15 kW
1.60 V/cell (288 V)	0 – 38 A	0 – 15 kW

### UPS battery (204 cells)<sup>3)</sup> (TORKEL 860)

1.80 V/cell (367 V)	0 – 34 A	0 – 15 kW
1.60 V/cell (326 V)	0 – 34 A	0 – 15 kW

3) 2.15 V per cell when test starts

## Specifications TXL830/850/870/890

Specifications are valid at nominal input voltage and an ambient temperature of +25°C, (77°F). Specifications are subject to change without notice.

### Environment

**Application field** The instrument is intended for use in high-voltage substations and industrial environments.

### Temperature

**Operating** 0°C to +40°C (32°F to +104°F)  
**Storage & transport** -40°C to +70°C (-40°F to +158°F)

**Humidity** 5% – 95% RH, non-condensing

### CE-marking

**EMC** 2004/108/EC  
**LVD** 2006/95/EC

### General


<b>Mains voltage</b>	100 – 240 V AC, 50/60 Hz
<b>Power consumption</b>	75 W (max)
<b>Protection</b>	Thermal cut-outs, automatic overload protection
<b>Dimensions</b>	
<b>Instrument</b>	210 x 353 x 600 mm (8.3" x 13.9" x 23.6")
<b>Transport case</b>	265 x 460 x 750 mm (10.4" x 18.1" x 29.5")
<b>Weight</b>	13 kg (28.7 lbs) 21.4 kg (47.2 lbs) with transport case
<b>Cable sets</b>	
<b>for TXL830/850</b>	2 x 3 m (9.8 ft), 70 mm <sup>2</sup> , 270 A, with cable lug. Max. 100 V. 5 kg (11 lbs)
<b>for TXL870/890</b>	2 x 3 m (9.8 ft), 25 mm <sup>2</sup> , 110 A, with cable clamp/lug. Max. 480 V. 3 kg (6.6 lbs)

### Load section

	TXL830	TXL850	TXL870	TXL890
<b>Voltage (DC) max.</b>	28 V	56 V	140/280 V	230/480 V
<b>Current max.</b>	300 A	300 A	112 A at 140 V 56 A at 280 V	63 A at 230 V 32 A at 480 V
<b>Power max.</b>	8.3 kW	16.4 kW	15.8 kW	15.4 kW
<b>Internal resistance, 3-position selector</b>				
<b>Position 1</b>	TXL830	TXL850	TXL870	TXL890
<b>Current</b>	0.275 Ω	0.55 Ω	4.95 Ω	14.10 Ω
<b>100 A</b>	at 27.6 V (12 x 2.3 V)	at 55.2 V (24 x 2.3 V)	–	–
<b>78.5 A</b>	at 21.6 V (12 x 1.8 V)	at 43.2 V (24 x 1.8 V)	–	–
<b>50.1 A</b>	–	–	at 248.4 V (108 x 2.3 V)	–
<b>39.2 A</b>	–	–	at 194.4 V (108 x 1.8 V)	–
<b>32.3 A</b>	–	–	–	at 469.2 V (204 x 2.3 V)
<b>26.0 A</b>	–	–	–	at 367.2 V (204 x 1.8 V)
<b>Position 2</b>	TXL830	TXL850	TXL870	TXL890
<b>Current</b>	0.138 Ω	0.275 Ω	2.48 Ω	7.05 Ω
<b>200 A</b>	at 27.6 V	at 55.2 V (24 x 2.3 V)	–	–
<b>156 A</b>	at 21.6 V	43.2 V (24 x 1.8 V)	–	–
<b>35.2 A</b>	–	–	–	at 248.4 V (108 x 2.3 V)
<b>27.8 A</b>	–	–	–	at 194.4 V (108 x 1.8 V)
<b>Position 3</b>	TXL830	TXL850	TXL870	TXL890
<b>Current</b>	0.092 Ω	0.184 Ω	1.24 Ω	3.52 Ω
<b>300 A</b>	at 27.6 V	at 55.2 V (24 x 2.3 V)	–	–
<b>235 A</b>	at 21.6 V	43.2 A (24 x 1.8 V)	–	–
<b>100 A</b>	–	–	at 124.2 V (54 x 2.3 V)	–
<b>78.4 A</b>	–	–	at 97.2 V (54 x 1.8 V)	–
<b>70.5 A</b>	–	–	–	at 248.4 V (108 x 2.3 V)
<b>55.2 A</b>	–	–	–	at 194.4 V (108 x 1.8 V)

**Additional equipment**

**TORTEL Win**

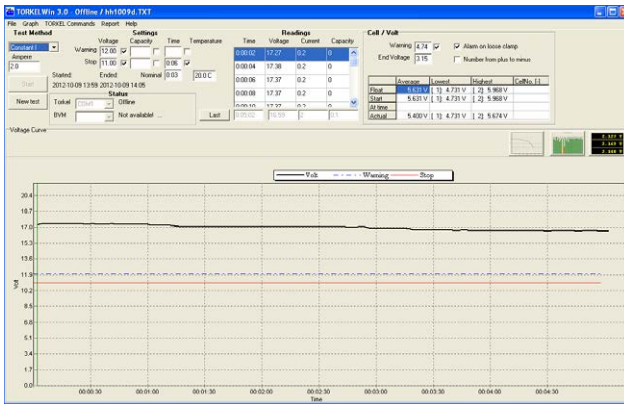

- Shows the complete voltage curve
- Last recorded time, voltage, current and discharged capacity
- Scroll-window for all recorded values
- Remote control of TORTEL
- Report functions

**Extra loads**



- There are four extra loads available TXL830, TXL850, 870 and TXL890

**Clamp-on-ammeters**



- Clamp-on ammeters, 200 A DC and 1000 A DC
- To measure current in circuit outside TORTEL

**BVM**



- Automates battery voltage measurement during capacity tests
- "Daisy-chain" design allows expandability up to 120 units
- High accuracy and stability for precise data collection
- Integrates with TORTEL Win and PowerDB Test Data Management software
- For complete information see BVM data sheet

**Included accessories**

**Cable set**



Cable set GA-00550

**Ordering information**

Item	Art. No.
<b>TORKEl 840</b> Complete with: Cable set GA-00550 Transport case GD-00054	BS-49094
<b>TORKEl 860</b> Complete with: Cable set GA-00550 Transport case GD-00054	BS-49096
<b>Optional</b>	
<b>TORKEl Win</b> PC software	BS-8208X
<b>Extra loads</b>	
TXL830	BS-59093
TXL850	BS-59095
TXL870	BS-59097
TXL890	BS-59099
<b>Cable sets</b>	
<b>Cable set for TXL850</b> 2 x 3 m, 70 mm <sup>2</sup> , with cable lug. Max 100 V 270 A. Weight: 5.0 kg (11 lbs)	GA-00554
<b>Extension cable set, 110 A</b> 2 x 3 m, 25 mm <sup>2</sup> . Max 480 V Weight: 3.0 kg (6.6 lbs)	GA-00552
<b>Sensing lead set</b> Cable set for measuring voltage at battery terminals. 2 x 5 m (16.4 ft)	GA-00210
<b>Clamp-on ammeters</b>	
<b>DC clamp-on ammeter, 200 A</b> To measure current in circuit outside TORKEl	XA-12992
<b>DC clamp-on ammeter, 1000 A</b> To measure current in circuit outside TORKEl	XA-12990
<b>BVM</b> <i>Including:</i> Dolphin clips, Power & signal connector, Power supply, Connection cables and Carrying case	
<b>BVM150</b> With TORKEl Win software System of 16 BVM units	CJ-59092
<b>BVM300</b> With TORKEl Win software System of 31 BVM units	CJ-59093
<b>BVM600</b> With TORKEl Win software System of 61 BVM units	CJ-59096
<b>BVM150</b> With PowerDB software System of 16 BVM units	CJ-59192
<b>BVM300</b> With PowerDB software System of 31 BVM units	CJ-59193
<b>BVM600</b> With PowerDB software System of 61 BVM units	CJ-59196

**SWEDEN**  
Megger Sweden AB  
Eldarvägen 4, Box 2970  
SE-187 29 TÄBY  
T +46 8 510 195 00  
F +46 8 510 195 95  
E seinfo@megger.com

**UK**  
Archcliffe Road Dover  
CT17 9EN England  
T +44 (0) 1304 502101  
F +44 (0) 1304 207342

**Other Technical Sales Offices**  
Dallas USA, Norristown USA,  
Toronto CANADA, Trappes FRANCE,  
Oberursel GERMANY, Johannesburg  
SOUTH AFRICA, Kingdom of BAHRAIN  
Mumbai INDIA, Chonburi THAILAND  
Sydney AUSTRALIA

Registered to ISO 9001 and 14001  
Subject to change without notice.  
Art.No. ZI-B502E • Doc. B52643DE • 2013  
TORKEl-840-860\_DS\_en\_V07  
www.megger.com  
Megger is a registered trademark