

# SDRM201

## Static / Dynamic Resistance Measurement

### Accessory for EGIL



- Enables resistance measurement on circuit breakers
- Small and light weight
- A number of operations can be run with short waiting intervals

#### DESCRIPTION

The SDRM201 is an accessory for EGIL. EGIL must be equipped with the SDRM option and CABA Win version R03A or higher is needed.

The SDRM201 is intended to use for both static and dynamic resistance measurements (SRM and DRM) on high voltage circuit breakers or other low resistive devices. Used together with EGIL the current and also the voltage-drop across the circuit breaker contacts are measured. The measuring unit can thus calculate the resistance as a function of time.

A system consists of an SDRM201 unit with current cables and an SDRM Cable. The SDRM Cable is a small box with integrated cables for connection to the SDRM201 and to EGIL.



The red current cable is 3.0 m (9.8 ft) and the black one is 0.5 m (1.6 ft).



The SDRM Cable.

### SPECIFICATIONS SDRM201

Inaccuracy is specified for 1 year after calibration at 22 °C to 28 °C, relative humidity 90%. Specifications are valid, after 30 minutes warm up time. Specifications are subject to change without notice.

#### Environment

**Application field** The instrument is intended for use in high-voltage substations and industrial environments.

**Installation category** CAT I

**Pollution degree** 2

#### Temperature

**Operating** -20°C to +50°C (-4°F to +122°F)

**Storage & transport** -40°C to +70°C (-40°F to +158°F)

#### Vibration

IEC 60068-2-6

2 g for 5-500 Hz

#### Shock (non-operating)

IEC 60068-2-27

30 g, half-sine, 11 ms

#### Degree of protection

**SDRM201/202 (Box) and** IP 43

**SDRM Cable intercon-**  
**connected**

**SDRM Cable** IP 41

#### Humidity

5% – 95% RH, non-condensing

#### CE-marking

#### LVD

2006/95/EC

#### EMC

2004/108/EC

#### General

#### Power inlet

**24 V / 2.5 A**



**Voltage** 24 V DC (max) 21 V DC (min)

**Current** 2.5 A (max 50% intermittence)

#### Dimensions

160 x 240 x 90 mm  
(6.3" x 9.4" x 3.5") excl. binding posts

#### Weight

1.3 kg (2.9 lbs)

2.5 kg (5.5 lbs) incl. current cables

**Total incl. transport case**  
**with accessories** 9.4 kg (20.7 lbs)

**SDRM Cable EGIL** 0.2 m (0.7 ft), 0.6 kg (1.3 lbs)

**Extension cable** 7.5 m (24.5 ft), 0.7 kg (1.5 lbs)

### SDRM201 – Terminals

#### CURRENT OUTPUT terminals – and +

**Open circuit** 2.5 V DC (max)

**Short circuit current (max)**

**Instantaneous** 500 A DC

**After 2 seconds** 150 A ±10%

**Minimum current with**  
**cables**

**Instantaneous** 200 A DC

**After 1 second** 140 A DC

**Overvoltage protection** 45 V between terminals and  
between terminals and ground

*Not to be connected to circuits generating peak power pulse  
above 1500 W (10/1000 μs)*

### SDRM Cable – Terminals

#### EGIL SDRM


#### Measurement ranges

**DRM / MOTION mode** 0 – 32 mΩ

**SRM mode** 0 – 2 mΩ

**DRM mode** 0 – 32 mΩ

**SRM inaccuracy** 2% ±2 μΩ

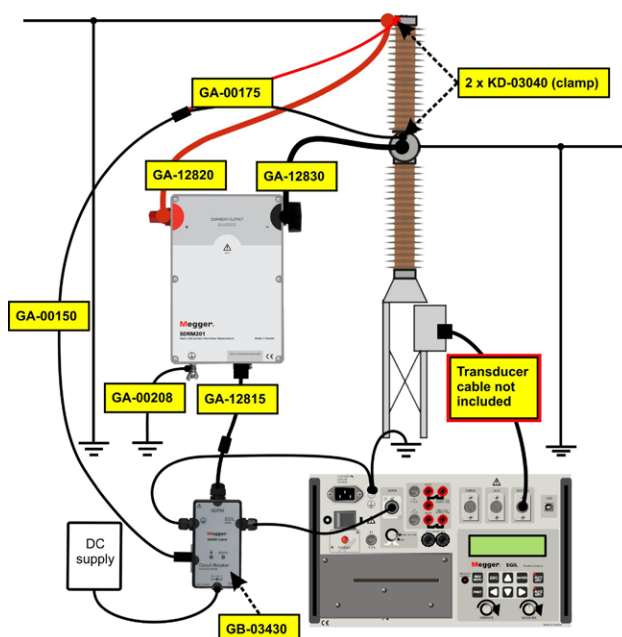

### ORDERING INFORMATION

Item	Art. No.
<b>SDRM201 for EGIL</b>	CG-90250
<b>Included accessories</b>	
SDRM Cable	GB-03430
SDRM multi cable extension	GA-12815
Voltage sense	GA-00175
Voltage sense extension cable	GA-00150
Current cable (red)	GA-12820
Current cable (black)	GA-12830
Clamps (2 pcs)	KD-03040
Ground cable	GA-00208
<b>Optional accessories</b>	
<b>Extension cables for multi cable</b>	
10 m (33 ft) extension	GA-12810
7.5 m (24.6 ft) extension	GA-12815

#### Postal address

Megger Sweden AB  
Box 724  
SE-182 17 Danderyd  
SWEDEN

T. 08 510 195 00  
E. seinfo@megger.com

#### SDRM201\_DS\_en\_V04a

Printed matter:  
Art.No. ZI-CG03E ■ Doc. CG1850DE ■ 2016  
Subject to change without notice

Registered to ISO 9001 and 14001  
The word 'Megger' is a registered trademark