


JITKIT Clock and Clock-Data Jitter Analysis Package

Key Features

- Four views of jitter – Statistical, Time, Spectral, and Overlay
- Quick and easy time correlation displays of jitter with other channels or math traces
- Overlay view provides intuitive and accurate view of jitter
- Direct display of jitter measurement values – max deviation + or –, worst case, peak-peak, standard deviation
- Clock or Clock-Data jitter measurements
- More than 25 measurement parameters supported

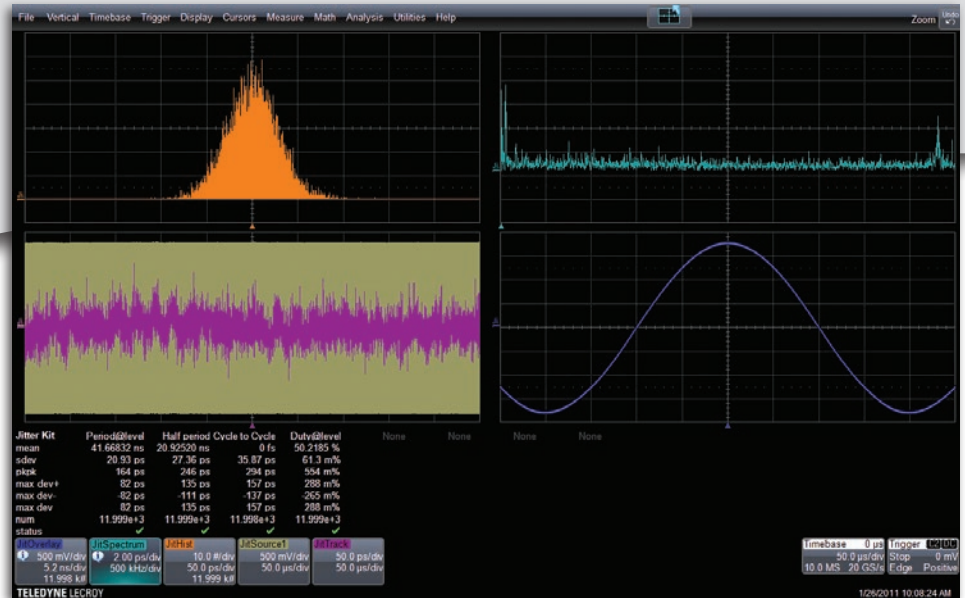

JITKIT makes it easy to understand various jitter behaviors for Clock or Clock-Data signals with jitter statistics and four different intuitive jitter views.

Fast and Easy Validation

Validating system jitter performance and analyzing systems with high jitter levels comprises a significant portion of a system engineer's test and validation time. JITKIT makes it simple and easy to understand the basic system jitter performance of clock signals and clock-data activities, including period, half period, cycle-cycle, skew, amplitude, differential voltage crossing, slew rate, and a wide variety of other common jitter measurements.

Direct Display of Jitter Values

Any measurement parameter set up from within the JITKIT user interface will have data presented in a jitter format that includes a direct readout of the max deviation positive and negative, worst case deviation, peak-peak deviation, and standard deviation. Up to eight measurement parameters with jitter statistics may be viewed at one time.

Four Views of Jitter Speeds Debug and Analysis

Up to four views of jitter statistics for any one jitter measurement parameter can be plotted simultaneously. It is easy to quickly re-define the source jitter parameter for all four jitter views, making validation and analysis a simple matter. Source(s) for the jitter measurements and other time-correlated causal signals can be simultaneously viewed with the jitter views to quickly understand the root cause of the high jitter.

SPECIFICATIONS AND ORDERING INFORMATION



Specifications

Measurement Parameters	Horizontal: Δ time, cycle-cycle (Specify group size and start cycle. Choose to use one value per group or sum all values per group), edge to edge, duty cycle, frequency, half period, period (Specify group size and start cycle), time interval error, hold time, setup time, phase, skew, width, Δ width Vertical: amplitude, base, maximum, mean, minimum, peak-peak, top Pulse: fall time, overshoot – (preshoot), overshoot +, rise time, slew rate Other: differential voltage crossing point
Measurement Level Setup	For each JitSource, set level in % or amplitude, set slope Apply globally (to all parameters) or individually (to each parameter)
Measurement Gating	Apply measurement gates by Divisions (0 to 10 max), by Number (0 to 1,000,000), or by Waveform (based on qualifying waveform state)
Jitter Plots/Views	JitSource1, JitSource2, JitHistogram, JitTrack, JitSpectrum, JitOverlay Apply some or all plots/views to any selected measurement parameter

Ordering Information

Product Description	Product Code	Product Description	Product Code
JITKIT Jitter Analysis Package for HDO6000 Oscilloscopes	HDO6K-JITKIT	Customer Service	
JITKIT Jitter Analysis Package for WaveRunner Xi/Xi-A Oscilloscopes	WRXi-JITKIT	Teledyne LeCroy oscilloscopes and probes are designed, built, and tested to ensure high reliability. In the unlikely event you experience difficulties, our digital oscilloscopes are fully warranted for three years and our probes are warranted for one year.	
JITKIT Jitter Analysis Package for WaveRunner 6 Zi Oscilloscopes	WR6Zi-JITKIT	This warranty includes:	
JITKIT Jitter Analysis Package for WavePro 7 Zi-A Oscilloscopes	WPZi-JITKIT	<ul style="list-style-type: none"> No charge for return shipping Long-term 7-year support Upgrade to latest software at no charge 	
JITKIT Jitter Analysis Package for WaveMaster 8 Zi-A Oscilloscopes	WM8Zi-JITKIT		
JITKIT Jitter Analysis Package for LabMaster 9 Zi-A Oscilloscopes	LM9Zi-JITKIT		
JITKIT Jitter Analysis Package for LabMaster 10 Zi Oscilloscopes	LM10Zi-JITKIT		



1-800-5-LeCroy
teledynelestroy.com

Local sales offices are located throughout the world.
Visit our website to find the most convenient location.